

Products

- CCTV
- Access Control
- ANPR
- Visitor Management
- Panic Alarm Systems
- Interview Recording

Markets

- Marine
- Oil & Gas
- Law Enforcement
- Parking
- Security



Explosionproof Optical PTZ Camera With IR - Stainless Steel

PTZ

PHOS2Z200I66

The camera is an ATEX Class I Division 1&2 / Class II Division 1&2 certified PTZ camera station, made in 316L stainless-steel, specifically designed for Hazardous Area applications. It is equipped with the latest generation 2MP IP day/night camera, and a high performance Infra-Red illuminator. It is designed for use in hazardous areas in onshore, offshore, marine and heavy industrial environments. For example, passenger ships & commercial vessels.



Features

- Explosionproof PTZ Dome Camera certified for use in hazardous environments
- ATEX Zone 1&2 / 21&22
- Class I Division 1&2 / Class II Division 1&2 and all the rest except zone 0.
- Marine 316L grade stainless steel
- 20x zoom lens
- IR distance:100M
- Support ONVIF, HIKVISION, DAHUA
- AC85V-260V
- Suited to strong corrosive environments. Anti-corrosion, waterproof.
- Smart windscreen wiper
- Supports digital wide dynamic, 3D-DNR, low bit rate
- Windows glass surface process by nano technology . Good light transmittance.
- Low power consumption
- Suited to harsh environmental conditions including petrochemicals, mining, military, medicine, oil & gas, marine, drilling platforms, food processing and storage, offshore etc.

Products

- CCTV
- Access Control
- ANPR
- Visitor Management
- Panic Alarm Systems
- Interview Recording

Markets

- Marine
- Oil & Gas
- Law Enforcement
- Parking
- Security

Technical Specifications

PHOS2Z200I66

Sensor	1/2.8" Progressive Scan CMOS
Sensitivity	Colour : 0.05Lux @ (F1.6, AGC ON); BW : 0.01Lux @(F1.6, AGC ON)
Optical Lens	4.7-94mm, 20x
Digital zoom	16x
Aperture range	F1.6-F3.5
Horizontal viewing angle	61.4-2.9 ° (Wide-Tele)
Min-working distance	10-1500mm(Wide-Tele)
Zoom speed	About 2.7 s (optical , Wide-Tele)
Shutter control	Auto exposure / aperture priority / shutter priority / manual exposure
Focusing mode	Auto /manual /one time focusing
IR Illumination range	100m @ 808nm
Maximum vehicle speed	PAL/NTSC
On-board storage (option)	Micro SD card 128GB
White balance	1/ 2Automatic / manual / indoor / outdoor lamp / fluorescent lamp
Signal to Noise ratio	>52dB
Video compression	H.264 /H.265/MJPEG
Bitrate	32 Kbps~16Mbps
Support protocols	TCP/IP、 HTTP、 DHCP、 DNS、 DDNS、 RTP、 RTSP、 PPPoE、 SMTP、 NTP、 UPnP、 SNMP、 FTP、 802.1x、 QoS、 HTTPS、 IPv6 (SIP、 SRTP、 Optional
Interface protocols	ONVIF、 PSIA、 CGI
Alarms	1ch Alarm In,1ch Alarm Out(optional)
Pan range	Horizontal : 0~360°Vertical: : ±90°
Pan speed	Horizontal : 0.1°/S~40°/s Vertical: : 0.1°/S~40°/s
Pre-sets	300
Audio connection	1ch Audio In,1ch Audio Out(optional)
Audio compression	G.711-a law、 G.711-u law、 G.726
RS485	RJ45
Power supply	AC85V-260V


Products

- CCTV
- Access Control
- ANPR
- Visitor Management
- Panic Alarm Systems
- Interview Recording

Markets

- Marine
- Oil & Gas
- Law Enforcement
- Parking
- Security

Ingress protection	IP66
Hazardous Area	ATEX Zone 1&2 / 21&22. Class I Division 1&2 / Class II Division 1&2 and all the rest except zone 0.
Material	316L stainless steel
Operating temp	-40°C~60°C
Relative humidity	≤ 95% (+25°C)
Atmospheric pressure	80kpa~106 kpa
Cable entry	1pcs M25*1.5 output(original G3/4)
Mounting options	Wall hanging, fixed bracket , pedestal base

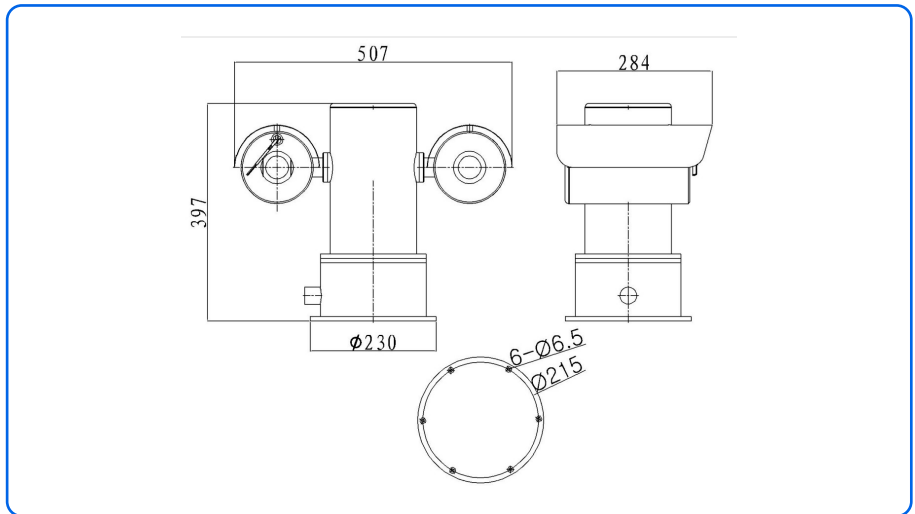

For more information on any of our products or services please contact:

Paragon Security Limited

Unit 14, Bentalls Business Park, Colchester Road, Maldon, Essex CM9 4GD UK
 +44 (0)1245 210914
 info@paragon-security.com
 paragon-security.com