

Products

- CCTV
- Access Control
- ANPR
- Visitor Management
- Panic Alarm Systems
- Interview Recording

Markets

- Marine
- Oil & Gas
- Law Enforcement
- Parking
- Security

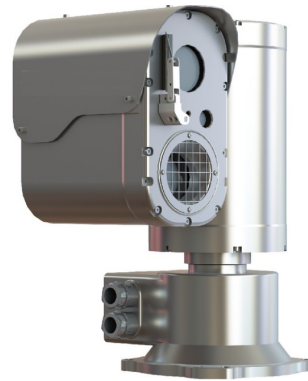


Explosionproof PTZ Camera - Optical & Thermal

PTZ

PHOTS2Z36II68T

This camera is a rugged corrosion-proof dual-head PTZ station designed for use in hazardous areas in onshore, offshore, marine and heavy industrial environments. The combination of thermal imaging and daylight cameras facilitates 24/7 remote camera surveillance. The daylight camera controls the movement of the camera (PTZ). The camera's standard thermal module is 35mm gives a 12.5 horizontal angle of view. It sits behind it's germanium window.

**Features**

- AISI 316L Electro Polished Stainless Steel
- 2MP resolution
- Optical 36X Zoom lens
- 360 degree Endless Pan / 180 degree Tilt
- Shock and Vibration Tested
- Tempered Glass
- Built-in Wiper
- Thermal (35mm / VGA / 12µm)
- Power options 24VDC / 110AC / 220AC
- IP68
- -40°C~60°C

Products

- CCTV
- Access Control
- ANPR
- Visitor Management
- Panic Alarm Systems
- Interview Recording

Markets

- Marine
- Oil & Gas
- Law Enforcement
- Parking
- Security

Technical Specifications

PHOTS2Z36II68T

Sensor	1/2" Sony Exmor CMOS
Resolution	2MP
Frame rate	50fps
Sensitivity	Colour: 0.05Lux
Optical Lens	Optical zoom 36x, 6.0-216mm F1.5
Digital zoom	8x
Horizontal viewing angle	H: 56.5°-2.1° / V: 33.6°-1.2°
Image features	DOL HDR, DNR, BLC, HLC, White balance, Exposure control, Mirror, Flip, Colour Corridor format.
Privacy masking	Yes
Analytics	Tamper, Video motion detection
Video compression	Simultaneously H.265, H.264 and MJPEG (Triple streaming). Independent Frame Rate and Bandwidth Control, VBR/CBR.
Support protocols	HTTPS, TCP/IP, UDP, IPv4/v6, HTTP, FTP, UPnP, RTP, RTSP, RTCP, DHCP, ARP, Zeroconf
Interface protocols	Open API, ONVIF profile S, T
Pan range	Pan: 360° endless, Tilt: ±90°
Pan speed	1.8°-20°/sec
Tilt speed	1.8°-20°/sec
Pre-sets	256
Thermal Imager	Uncooled VOx Microbolometer
Pixel pitch	640x480
Thermal Resolution	8-14µm
Thermal Frame rate	<50mK@f1.0
Thermal Focal length (mm) options	35mm, f1.0
Thermal Field of view (degrees) options	H: 12.5° / V: 9.4°
Temperature display mode	Red Hot / Iron / Rainbow / Amber / Black Hot / White Hot(Total : 11 Colour Support)

Products

- CCTV
- Access Control
- ANPR
- Visitor Management
- Panic Alarm Systems
- Interview Recording

Markets

- Marine
- Oil & Gas
- Law Enforcement
- Parking
- Security

Ethernet	RJ45
Alarm in/out	1 alarm input, 1 relay, 1 RS485
Power supply	24VDC Option 110VAC/220VAC
Power consumption	60W
Ingress protection	IP68
Hazardous Area	ATEX, IECEx, KCs
Material	AISI 316L Electro Polished Stainless Steel
Operating temp	-40°C - +60°C
Relative humidity	0-90% RH(Non-condensing)
Weight (kg)	Approx. 32Kg
Dimensions - external (mm)	353(W)x412(H)x210(D)mm
Cable entry	Two M25 conduit entries
Mounting options	Wall hanging, fixed bracket , pedestal base

**For more information on any of our products
or services please contact:**

Paragon Security Limited

Unit 14, Bentalls Business Park, Colchester
Road, Maldon, Essex CM9 4GD UK

+44 (0)1245 210914

info@paragon-security.com

paragon-security.com